


Dome Camera

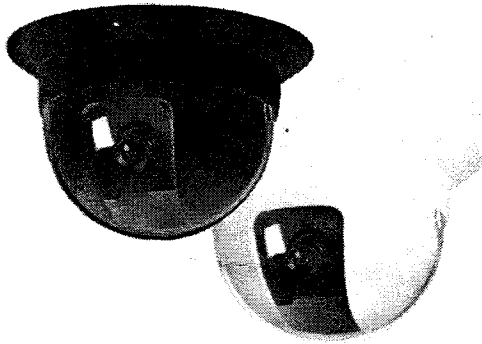

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER OR BACK. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

CAUTION:
To prevent electric shocks and risk of fire hazards, do NOT use other than specified power source.



The symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance




The symbol is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

NOTICE

- Do not attempt to disassemble the camera.
In order to prevent electric shock, do not remove screws or cover.
- Handle the camera with care.
The camera could be damaged by improper handling or storage.
- Do not aim the camera to the sun or strong light.
- Do not drop the camera or expose it to strong shocks.
- Do not clean the camera glass with abrasives or soaps, when the camera becomes dirty, clean it with dry rags. Especially, make sure to use the dedicated rags for lens to clean the glass.
- Please use the camera in the right limits of assigned voltage and electric current.

DIAGRAM

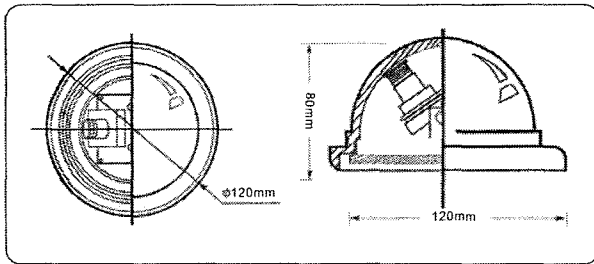

SPECIFICATIONS

Image Pick-up Device	1/3" Hi-Resolution CCD	1/3" SONY CCD	1/3" SHARP CCD	1/4" SHARP CCD	1/3" B/W CCD
Number of Pixels	NTSC:768 x 494 PAL:752 x 582	NTSC:510(H) x 492(V); PAL:500(H) x 582(V)			EIA:510(H) x 492(V); CCIR:500(H) x 582(V)
Scanning System	NTSC:525 Lines, 60Field/sec; PAL:625 lines, 50 Field/sec				EIA:525 Lines, 60Field/sec; CCIR:625 lines, 50 Field/sec
Sync System	Internal Synchronization				
Horizontal Resolution	NTSC:410K, PAL:470K	NTSC:270K, PAL:320K	NTSC:270K, PAL:320K	NTSC:270K, PAL:320K	EIA:270K, CCIR:320K
Gamma Characteristic	0.45	0.45	0.45	0.45	0.45
Video Output	1.0Vp-p,75ohm	1.0Vp-p,75ohm	1.0Vp-p,75ohm	1.0Vp-p,75ohm	1.0Vp-p,75ohm
S/N Ratio	≥48dB(AGC Off)	≥48dB(AGC Off)	≥48dB(AGC Off)	≥48dB(AGC Off)	≥48dB(AGC Off)
Electronic Shutter Time	On: Auto, NTSC:1/60~1/100,000Sec, PAL:1/50~1/100,000 Secretary.				EIA:1/60~1/100,000Sec, CCIR:1/50~1/100,000Sec.
Cable	BNC/DC JACK	BNC/DC JACK	BNC/DC JACK	BNC/DC JACK	BNC/DC JACK
Lens	f:3.6mm (Option)	f:3.6mm (Option)	f:3.6mm (Option)	f:3.6mm (Option)	f:3.6mm (Option)
White Balance	Auto	Auto	Auto	Auto	Auto
Useable Illumination	SONY:0.8Lux (F:1.2) SHARP:1.2Lux (F:1.2)	0.1Lux (F:1.2)	0.5Lux (F:1.2)	1.5Lux (F:1.2)	0.05Lux (F:1.2)
Operation Temp.	-10 °C ~ +50 °C RH 95% Max				
Storage Temp.	-20 °C ~ +60 °C RH95% Max				
Power supply	DC 12V ± 10% 150mA	DC 12V ± 10% 150mA	DC 12V ± 10% 150mA	DC 12V ± 10% 150mA	DC 12V ± 10% 150mA
Power consumption	120mA	100mA	90mA	80mA	100mA
Dimension	120(D) X 80(H) mm	120(D) X 80(H) mm	120(D) X 80(H) mm	120(D) X 80(H) mm	120(D) X 80(H) mm